


Cable construction code

OT.x1,7ECH xx.yy.zz.c

DIN code

A-DQ(ZN)(SR)2Y wbg nx1,7

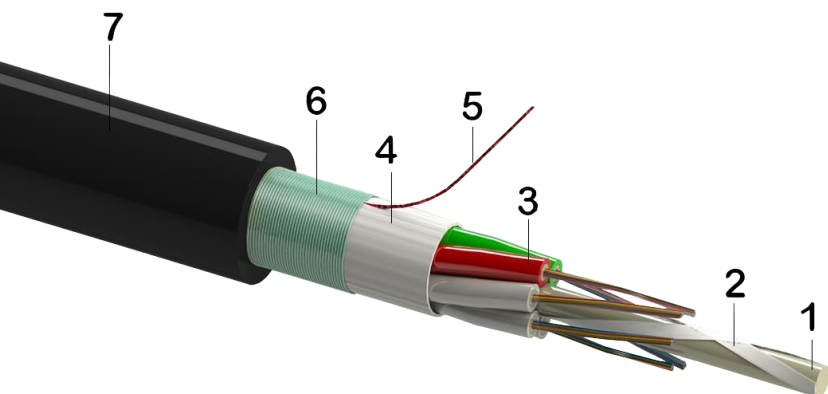

1. FRP central strength member
2. Water swell-able yarn
3. Gel filled PBT loose tube with optical fibers
4. Water swell-able e-glass yarn
5. Rip-cord
6. Corrugated steel tape armour
7. HDPE UV stable outer jacket

Cable general description

Multi-loose-tube corrugated steel tape armoured cable for outdoor duct or direct buried installation. This cable construction offers excellent mechanical and full rodent protection.

Construction and dimensions	OT6x1,7ECH	OT8x1,7ECH	OT3x1,7ECH	OT9x1,7ECH
Max. fibre count (12 fibres/tube)	72	96	144	216
Loose-tubes count	6	8	12	18(6+12) - two layers
Loose tube nominal diameter (mm)	1,7	1,7	1,7	1,7
FRP/coat. CSM nominal thickness (mm)	1,7	2,8	2,5/5,0	1,7
Outer jacket nominal thickness (mm)	1,3	1,3	1,3	1,3
Cable nominal outer diameter (mm)	11,0	12,0	14,0	14,0
Cable informative weight (kg/km)	115	140	185	185
Standard put-up length (m)	2100/4100 ± 5%	2100/4100 ± 5%	2100/4100 ± 5%	2100/4100 ± 5%

Outer jacket

Material	UV stable HDPE
Jacket colour	Black
Sheath marking	Ink-Jet, white
Print legend	Trademark, construction name, cable type, batch-number, meter-marking Customer print legend available on request

Optical fibers

Colour coding (IEC 60304)	1.-12.: red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange, pink
Loose-tube colour coding	1.red, 2.green (in each layer), rest of tubes white (fillers uncoloured or black)
Fiber type	Single- and multi-mode fibers (OS2, OM1, OM2, OM3, OM4)

Geometrical and transmission parameters are available at separate generic datasheet

**Mechanical characteristics**

Test	Test method	Value	Acceptance criteria*				
			OT6x	OT8x	OT3x	OT9x	
Tensile performance	IEC 60794-1-21:E1	long term	800 N	1200 N	1200 N	1100 N	$\Delta\alpha \leq 0,05$ dB $\Delta\alpha \leq 0,05$ dB after test
		short term	2500 N	4000 N	4000 N	3500 N	
Crush	IEC 60794-1-21:E3A	2500 N/100mm (long term) 5000 N/100mm (short term)	$\Delta\alpha \leq 0,05$ dB prior release, no damage $\Delta\alpha \leq 0,05$ dB after release, no damage				
Impact	IEC 60794-1-21:E4	20 Nm, 3 impacts, d=20 mm, R=300 mm	$\Delta\alpha \leq 0,05$ dB after test, no damage				
Repeated bending	IEC 60794-1-21:E6	R=20 x cable diameter, 25 cycles	no damage				
Torsion	IEC 60794-1-21:E7	L=1 m, rotation angle $\pm 180^\circ$ , 10 cycles	no damage				
Bend	IEC 60794-1-21:E11A	d=20 x cable diameter, 4 turns, 3 cycles	$\Delta\alpha \leq 0,05$ dB after test, no damage				

**Environmental characteristic**


Test	Test method	Value	Acceptance criteria*
Temperature cycling	IEC 60794-1-22:F1	-40°C ÷ 70°C	$\Delta\alpha \leq 0,05$ dB
Temperature range of use		-5°C ÷ 50°C	installation
		-40°C ÷ 70°C	operation
		-40°C ÷ 70°C	storage, transport
Moisture resistance	IEC 60794-1-22:F5B	L=3 m, 1 m water height, 24 h	no water leakage

\* IEC 60794-3-10, IEC 60794-3-11

Cable expected lifetime / min. 30 years

**Order information**

Order code e.g.: OT6x1,7ECH 06.12.M3.B



Detailed explanation of the FOC constructions coding found in the file *FOC coding*.