


Cable construction code

OX1ECH xx.yy.zz.c

DIN code

A-DQ(ZN)(SR)2Y wbg

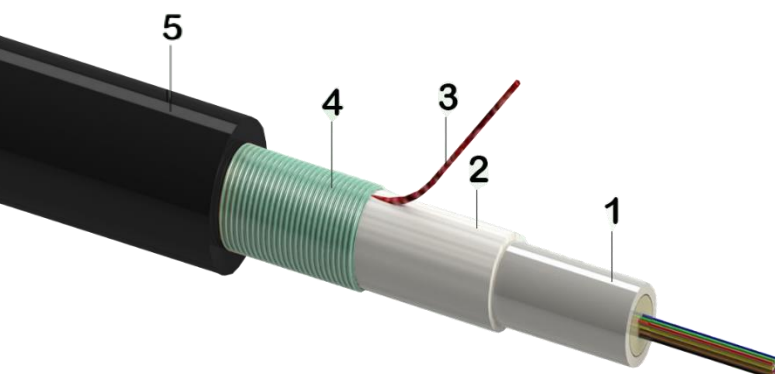

1. Gel filled PBT loose tube with optical fibers
2. Water swell-able e-glass yarn
3. Rip-cord
4. Corrugated steel tape armour
5. HDPE UV stable outer jacket

Cable general description

Max. 24 fibre uni-tube corrugated steel tape armoured cable for outdoor duct or direct buried installation. This cable construction offers good mechanical and full rodent protection.

Construction and dimensions

Loose tube nominal diameter	3,0 mm
Outer jacket nominal thickness	1,2 mm
Cable nominal outer diameter	7,7 mm
Cable informative weight	70 kg/km
Standard put-up length	2100/4100 m ± 5%

Outer jacket

Material	UV stable HDPE
Jacket colour	Black
Sheath marking	Ink-Jet, white
Print legend	Trademark, construction name, cable type, batch-number, meter-marking Customer print legend available on request

Optical fibers

Colour coding (IEC 60304)	1.-12.: red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange, pink 13.-24.: red, green, blue, yellow, white, grey, brown, violet, turquoise, natural, orange, pink (ring-marked)
Fiber type	Single- and multi-mode fibers (OS2, OM1, OM2, OM3, OM4)

*Geometrical and transmission parameters are available at separate generic datasheet*

**Mechanical characteristics**

Test	Test method	Value	Acceptance criteria*
Tensile performance	IEC 60794-1-21:E1	500 N (long term) 1500 N (short term)	$\Delta\alpha \leq 0,05$ dB $\Delta\alpha \leq 0,05$ dB after test
Crush	IEC 60794-1-21:E3A	2500 N/100mm (long term) 5000 N/100mm (short term)	$\Delta\alpha \leq 0,05$ dB prior release, no damage $\Delta\alpha \leq 0,05$ dB after release, no damage
Impact	IEC 60794-1-21:E4	20 Nm, 3 impacts, d=20 mm, R=300 mm	$\Delta\alpha \leq 0,05$ dB after test, no damage
Repeated bending	IEC 60794-1-21:E6	R=20 x cable diameter, 25 cycles	no damage
Torsion	IEC 60794-1-21:E7	L=1 m, rotation angle $\pm 180^\circ$ , 10 cycles	no damage
Bend	IEC 60794-1-21:E11A	d=20 x cable diameter, 4 turns, 3 cycles	$\Delta\alpha \leq 0,05$ dB after test, no damage

**Environmental characteristic**


Test	Test method	Value	Acceptance criteria*
Temperature cycling	IEC 60794-1-22:F1	-20°C ÷ 70°C -30°C ÷ 70°C	$\Delta\alpha \leq 0,05$ dB $\Delta\alpha \leq 0,15$ dB, reversible
Temperature range of use		-5°C ÷ 50°C -20°C ÷ 70°C -30°C ÷ 70°C	installation operation storage, transport
Moisture resistance	IEC 60794-1-22:F5B	L=3 m, 1 m water height, 24 h	no water leakage

\* IEC 60794-3-10, IEC 60794-3-11

Cable expected lifetime / min. 30 years

**Order information**

Order code e.g.: OX1ECH 01.24.M3.B

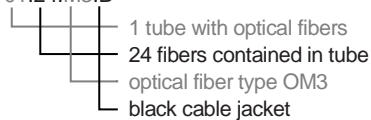

Detailed explanation of the FOC constructions coding found in the file *FOC coding*.